


# nLIGHT AIR: CONFERENCE - AIR ENABLED FIXTURES

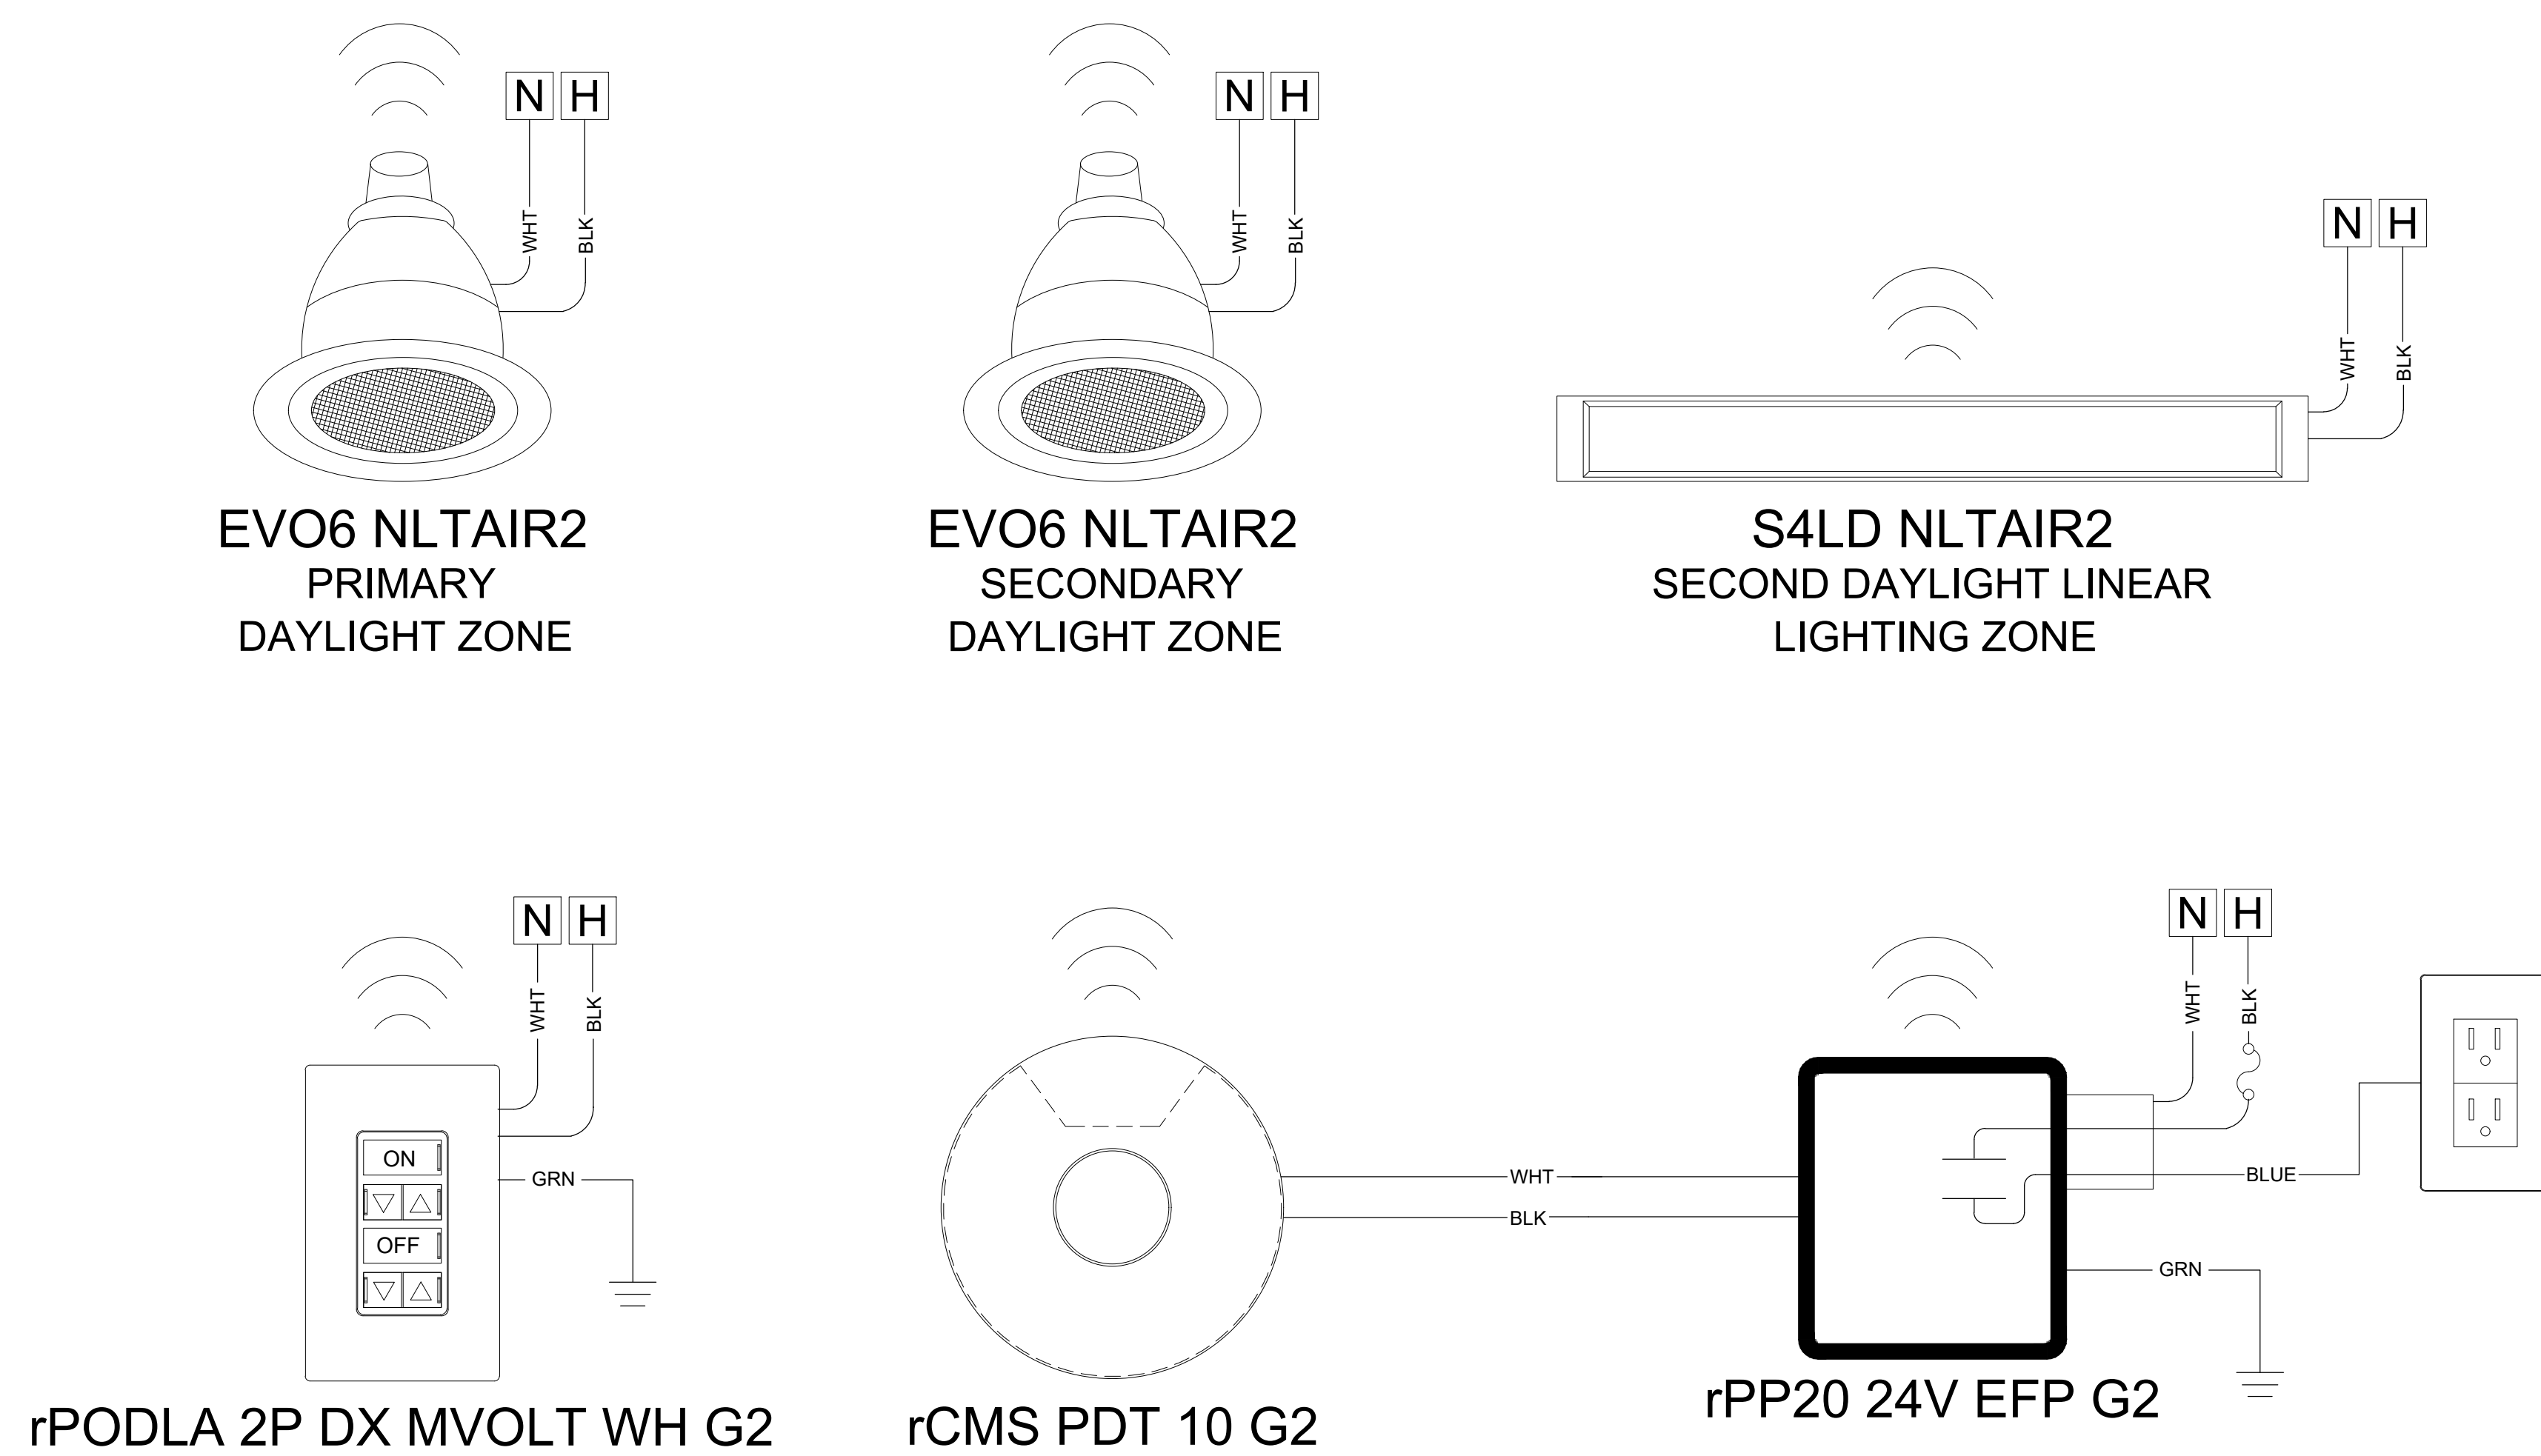

SEE SDLA BASIS OF DESIGN TO COMPLY WITH TITLE 24 SECTION 120.8(c)

| BILL OF MATERIAL |  |  |
|------------------|--|--|
| QTY              | PRODUCT #  | DESCRIPTION  |
| TBD              | EVO6 xx/xx AR xx Lxx<br>MVOLT EZ1 NLTAIR2  | INTEGRAL FIXTURE EMBEDDED POWERPACK;<br>WIRELESS COMMUNICATION   |
| TBD              | S4LD LLP xFT MSLx 80CRI<br>xxK xxLMF MIN1 MVOLT xxx<br>NLTAIR2 Fx/xxA xxCY<br>xxxCY xCRD | INTEGRAL FIXTURE EMBEDDED POWERPACK;<br>WIRELESS COMMUNICATION   |
| 1                | rCMS PDT 10 G2   | COMBO EXTENDED RANGE 360° SENSOR WITH DAYLIGHTING-<br>CEILING MOUNT, LOW VOLTAGE, DUAL TECHNOLOGY (PDT);<br>WIRELESS COMMUNICATION |
| 1                | rPP20 24V EFP G2   | 20 AMP RELAY PACK WITH 24VDC OUTPUT,<br>CHASE NIPPLE MOUNTING; WIRELESS COMMUNICATION  |
| 1                | rPODLA 2P DX MVOLT<br>WH G2  | 2 CHANNEL ON/OFF TOGGLE WITH DIMMING,<br>LINE POWERED; WIRELESS COMMUNICATION  |

SEE FLOORPLANS FOR QUANTITY OF FIXTURES AND nLIGHT COMPONENTS REQUIRED.

FOR nLIGHT DESIGN ASSISTANCE OR A COMPLETE BOM ON PROJECT - CONTACT SDLA @  
CONTROLS@SDLTG.COM OR (858)505-1055

