
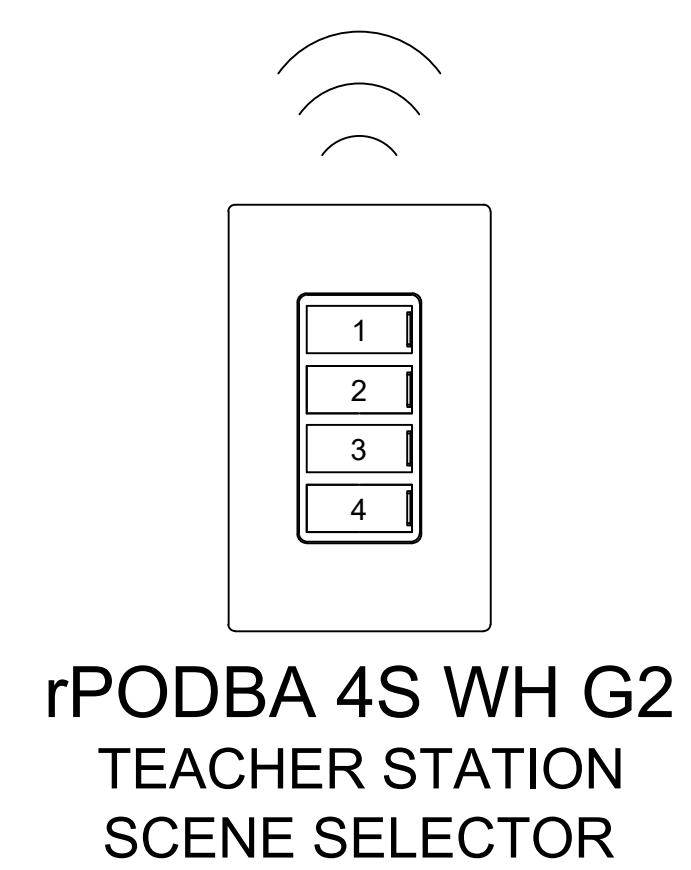
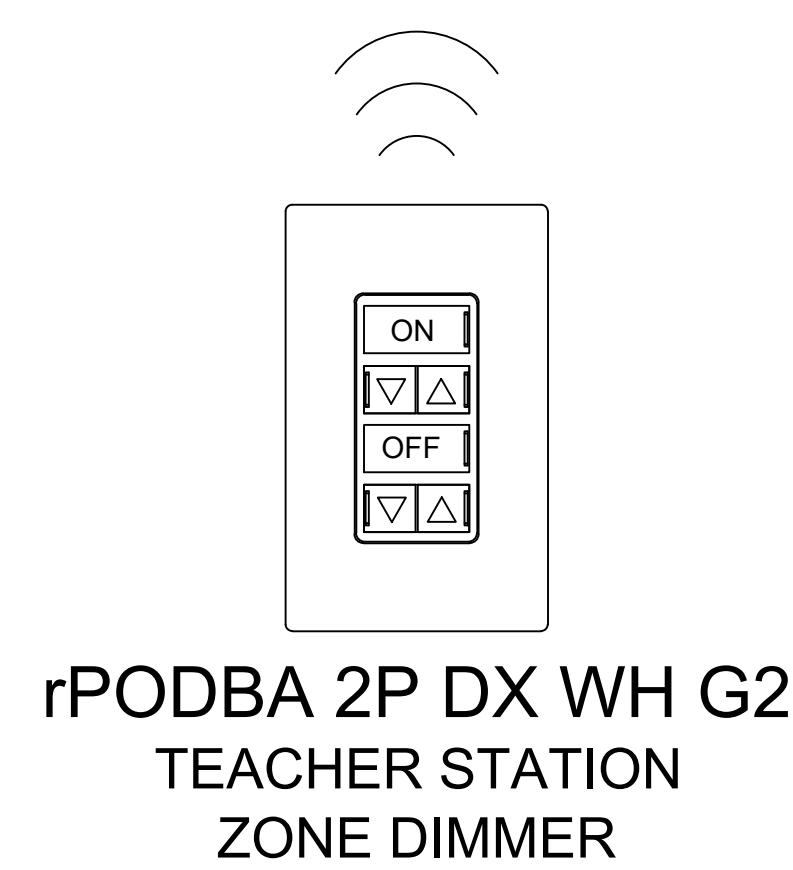
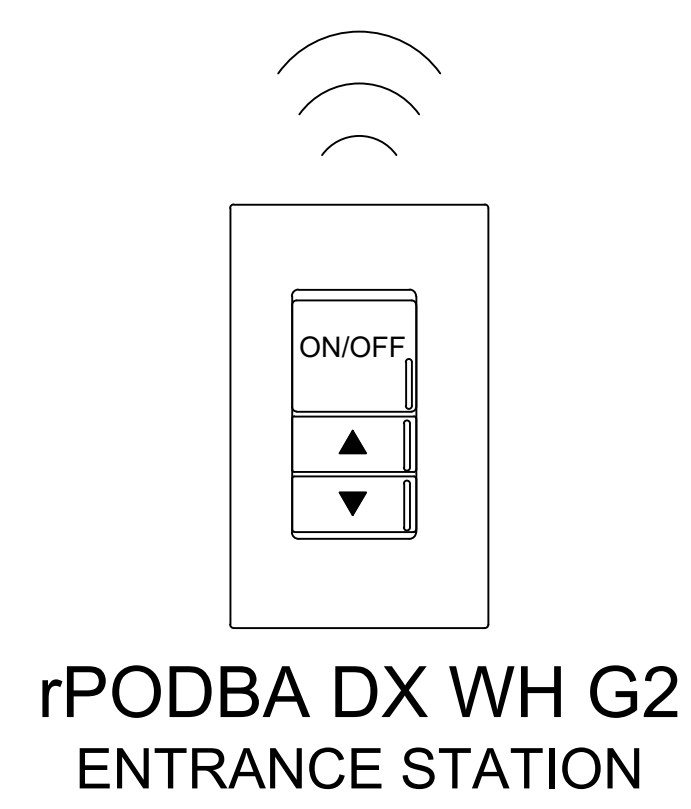
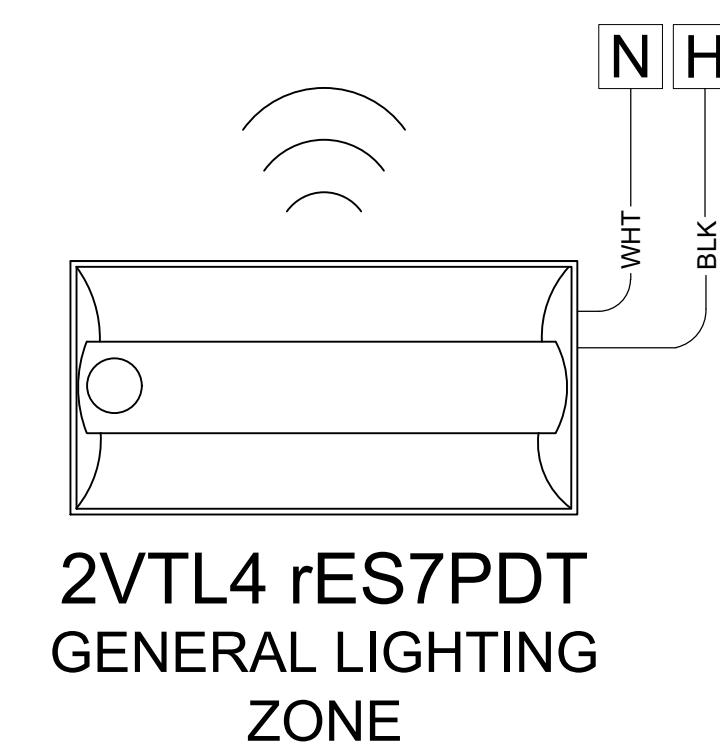


# nLIGHT AIR: CLASSROOM - AIR ENABLED FIXTURES

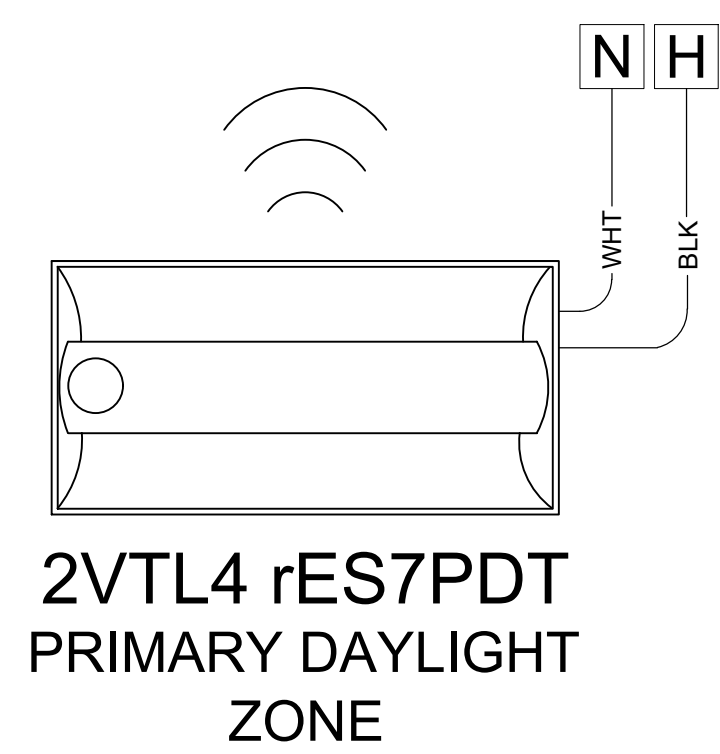

SCENE SELECTOR	
SCENES	LIGHTING LEVELS
1	100%
2	A/V MODE
3	25%
4	OFF

SEE SDLA BASIS OF DESIGN TO COMPLY WITH TITLE 24 SECTION 120.8(c)

BILL OF MATERIAL		
QTY	PRODUCT #	DESCRIPTION
TBD	2VLT4 xxL ADPT EZ1 LPxxx NLTAIR2 RES7PDT	INTEGRAL FIXTURE EMBEDDED COMBO STANDARD RANGE 360° SENSOR WITH DAYLIGHTING, DUAL TECHNOLOGY (PDT); WIRELESS COMMUNICATION
TBD	SL4L LOP xFT FLP xx xxCRI xxK xxLMF WW MIN1 xxx xxx/xxx NLTAIR2	RECESSED LINEAR WITH EMBEDDED POWERPACK; WALL WASH DISTRIBUTION; WIRELESS COMMUNICATION
1	rPODBA DX WH G2	1 CHANNEL ON/OFF TOGGLE WITH DIMMING, BATTERY POWERED; WIRELESS COMMUNICATION
1	rPODBA 4S WH G2	4 PRESET SCENE SELECTOR, BATTERY POWERED; WIRELESS COMMUNICATION
1	rPODBA 2P DX WH G2	2 CHANNEL ON/OFF TOGGLE WITH DIMMING, BATTERY POWERED; WIRELESS COMMUNICATION

SEE FLOORPLANS FOR QUANTITY OF FIXTURES AND nLIGHT COMPONENTS REQUIRED.

FOR nLIGHT DESIGN ASSISTANCE OR A COMPLETE BOM ON PROJECT - CONTACT SDLA @  
CONTROLS@SDLTG.COM OR (858)505-1055

